

Lockout bar for guardlocking

Unintentional closing of the guard door is prevented by the bolt. The bolt is secured by 3 \varnothing 7.2 mm holes. A bolt diameter of 4.5 mm to 7.0 mm secures the locking function.


To lock the actuator head, the bolt must be fed into the actuator head in the open position.

Then, the feeder is inserted into the actuator head until the holes overlap.

Product characteristics

- Material: stainless steel 1.4301

Technical drawing

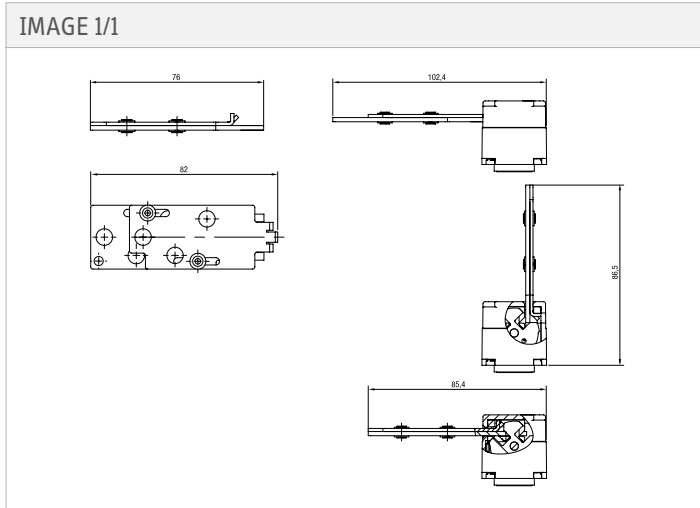

Attribute	ZEOS
Pin diameter	4,5 - 7 mm
Number of bore holes	3

Mechanical data

Attribute	ZEOS
Dimensions	76 x 28 x 3 mm (H/B/T)

Material information

Attribute	ZEOS
Housing material	Edelstahl 1.4308

Installation

Attribute	ZEOS
Mounting type	inserted