




Actuator for safety interlocks ZBG5GE

Technical specifications

- With insertion funnel
- Overrun 5 mm
- Material: stainless steel 1.4301, CR

Technical drawing

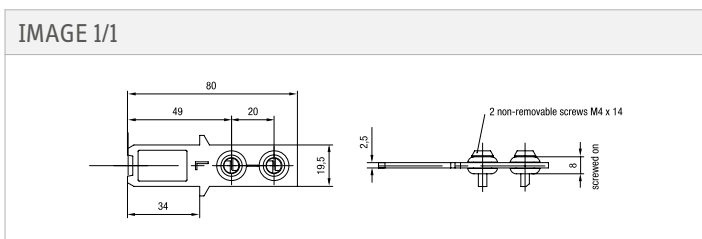

Mechanical data

| Attribute | ZBG5GE |
|-------------------------------|------------------------|
| Dimensions | 29 x 80 x 8 mm (H/B/T) |
| Tensile force max. | 3000 N |
| Door radius min. | 300 mm |
| Overrun max. | 5 mm |
| Usability of insertion funnel | no |

Material information

| Attribute | ZBG5GE |
|------------------|--|
| Housing material | Betaetiger/Schraube Stahl rostfrei Gummituelle NBR |

Installation

| Attribute | ZBG5GE |
|---------------|-----------|
| Mounting type | screwed |
| Installation | arbitrary |