




Actuator 165MBK

When used with the corresponding safety sensor, the magnetic actuator of the new eloProtect M range enables optimised operating distances and offset values as well as increased tampering protection.

Technical specifications

- Flexibility in installation and use from variable actuation direction
- Space saving and simple installation through small size
- Screw covers prevent easy removal and the accumulation of dirt
- Strong resistance against cleaning agents (ECOLAB) makes this suitable for use in the food and packaging industries.

Technical drawing

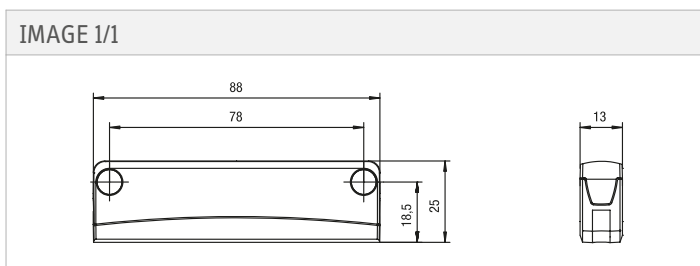

Properties

Attribute	165MBK101	165MBK201	165MBK301
Coding acc. to EN ISO 14119	Low		
Suitable for sensor type(s)	165MSK		

Mechanical data

Attribute	165MBK101	165MBK201	165MBK301
Dimensions	88x25x13		

Material information

Attribute	165MBK101	165MBK201	165MBK301
Housing material	PBT/PC		
Housing colour	grau/schwarz		

Installation

Attribute	165MBK101	165MBK201	165MBK301
Mounting type	screwed		
Torque for fastening screws	0.7 N m		