



AMP Superseal 1.5 2-pin/3-pin

Product characteristics

- Suitable for ultrasonic sensor 2UF and angle sensor 424A

Technical drawing

IMAGE 1/3


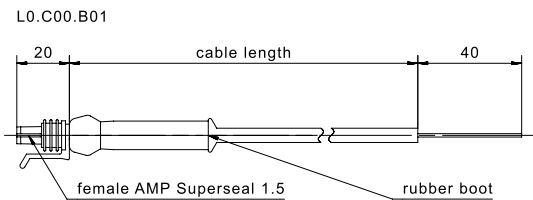


IMAGE 2/3

L0BC00.B01
 female AMP
 Superseal 1.5



L0CC00.B01
 female AMP
 Superseal 1.5




IMAGE 3/3

L0BC00.B01

1) ————— BU

2) ————— BN

L0CC00.B01

1) ————— BU

2) ————— BN

3) ————— BK

Material information

Attribute	LOBC...B01	LOCC...B01
Cable material	PVC	

Environmental conditions

Attribute	LOBC...B01	LOCC...B01
Operating temperature min.	-25 °C	
Max. operating temperature	70 °C	
Min. storage temperature	-25 °C	
Max. storage temperature	70 °C	

Connection

Attribute	LOBC...B01	LOCC...B01
Connector type	AMP-Superseal Buchse	
Cable diameter	5,7 +/-0,1 mm	5,5 +/-0,2 mm
Number of pins	2	3
Number of strands	2	3
Wire cross section	0.5 mm ²	
Cable length	wählbar (1m, 3m, 5m, 10m)	