



Deutsch connector DT 06-8S 4-pin/8-pin

Product characteristics

- Suitable for tilt sensors N3/N4/N5

Technical drawing

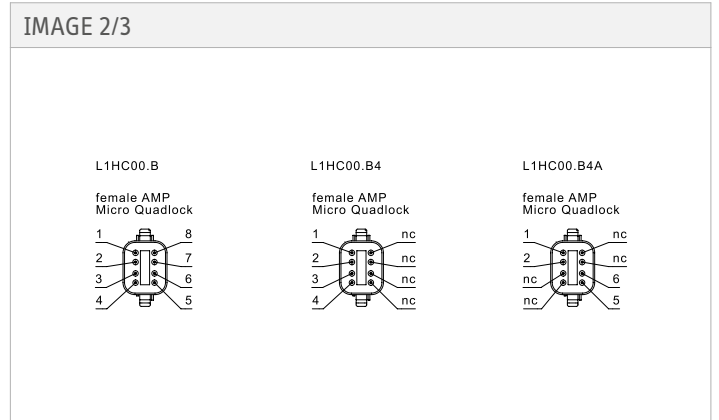
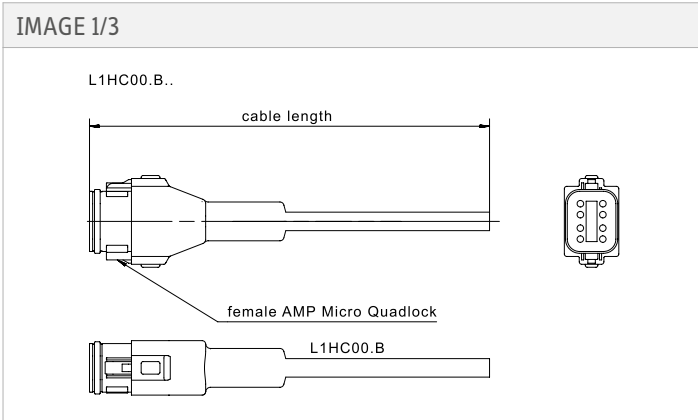


IMAGE 3/3

L1HC00.B	L1HC00.B4	L1HC00.B4A
1) ——— RD	1) ——— BN	1) ——— BN
2) ——— BN	2) ——— BU	2) ——— BU
3) ——— BU	3) ——— BK	3) nc
4) ——— PK	4) ——— GY	4) nc
5) ——— GN	5) nc	5) ——— BK
6) ——— YE	6) nc	6) ——— GY
7) ——— WH	7) nc	7) nc
8) ——— GY	8) nc	8) nc

Material information

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Cable material	PVC		

Installation

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Operating temperature min.	-40 °C		
Max. operating temperature	80 °C		
Min. storage temperature	-40 °C		
Max. storage temperature	80 °C		

Connection

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Connector type	Deutsch Stecker DT 06-8S Buchse		
Cable diameter	7,5 +/-0,2 mm	5,5 +/-0,3 mm	
Number of pins	8		
Number of strands	8	4	
Wire cross section	0.5 mm ²		
Cable length	wählbar (1m, 3m, 5m, 10m)		