



## Deutsch connector DT 06-8S 4-pin/8-pin

### Product characteristics

- Suitable for tilt sensors N3/N4/N5

### Technical drawing

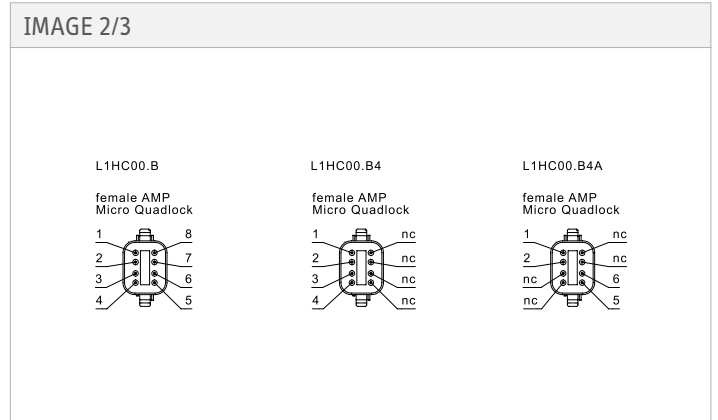
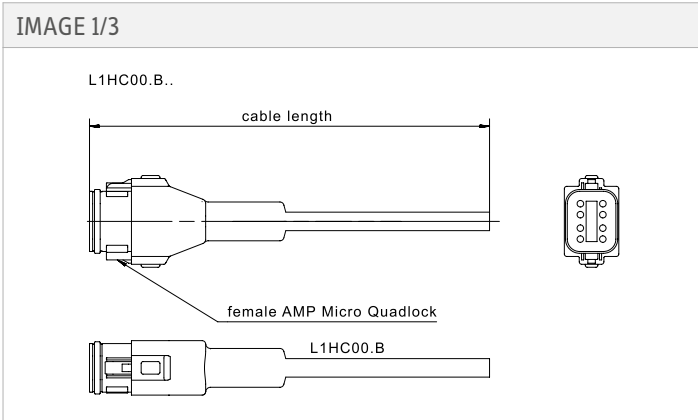


IMAGE 3/3

L1HC00.B	L1HC00.B4	L1HC00.B4A
1) ——— RD	1) ——— BN	1) ——— BN
2) ——— BN	2) ——— BU	2) ——— BU
3) ——— BU	3) ——— BK	3)        nc
4) ——— PK	4) ——— GY	4)        nc
5) ——— GN	5)        nc	5) ——— BK
6) ——— YE	6)        nc	6) ——— GY
7) ——— WH	7)        nc	7)        nc
8) ——— GY	8)        nc	8)        nc

## Material information

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Cable material	PVC		

## Installation

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Operating temperature min.	-40 °C		
Max. operating temperature	80 °C		
Min. storage temperature	-40 °C		
Max. storage temperature	80 °C		

## Connection

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Connector type	Deutsch Stecker DT 06-8S Buchse		
Cable length	10 m		
Cable diameter	7,5 +/-0,2 mm	5,5 +/-0,3 mm	
Number of pins	8		
Number of strands	8	4	
Wire cross section	0.5 mm <sup>2</sup>		