



Circular connector M8 4-pin

Product characteristics

- High protection class as well as high temperature range to meet the demands of adverse industrial environments
- Circular connector for customised assembly

Technical drawing

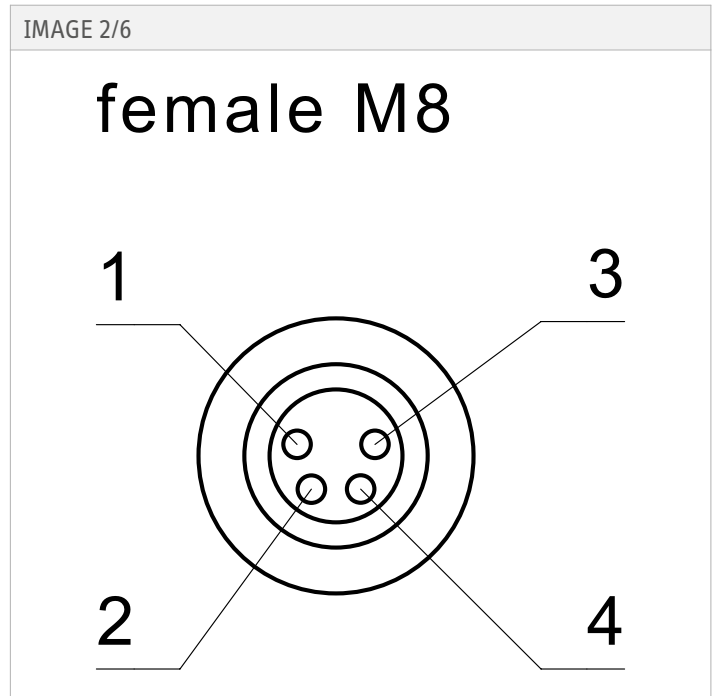
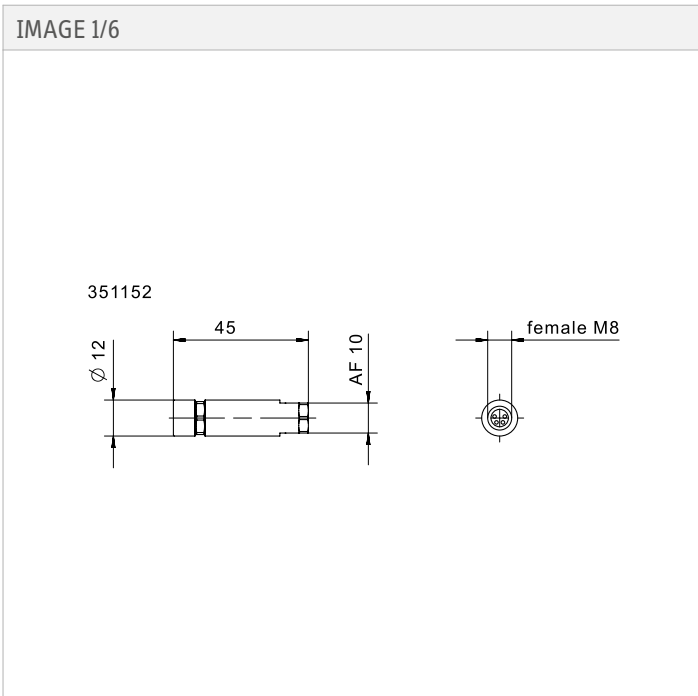


IMAGE 3/6

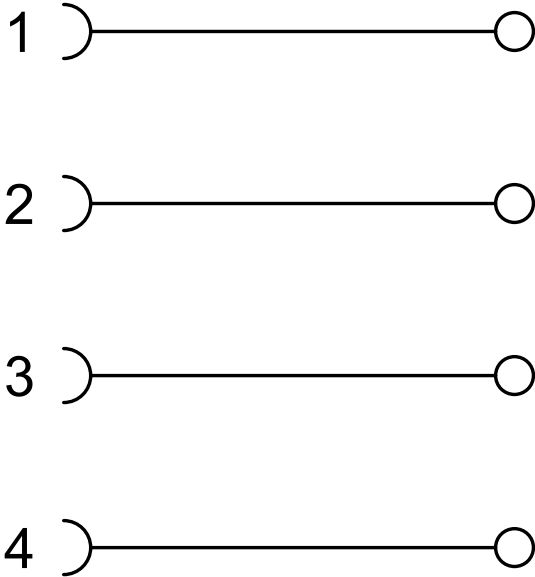


IMAGE 4/6

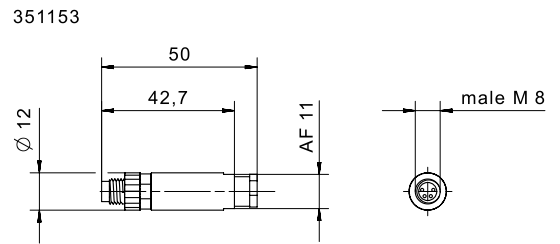


IMAGE 5/6

male M8


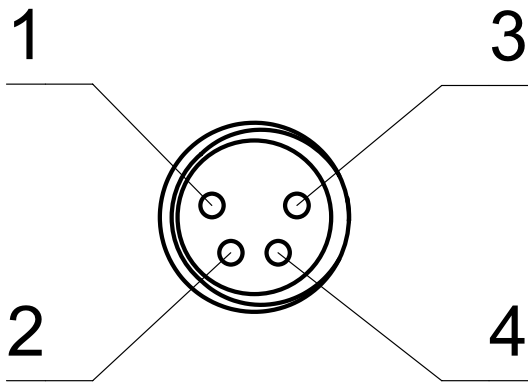


IMAGE 6/6

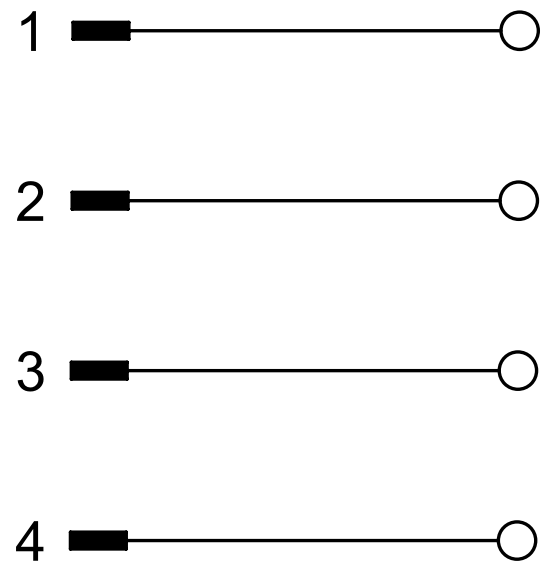

Attribute	351152	351153
Pollution degree	3	

Electrical data

Attribute	351152	351153
Max. switching current per contact	4 A	
Rated impulse withstand voltage (Uimp)	800 V	
Operating voltage max.	240 V DC	
Operating voltage max.	240 V AC	

Material information

Attribute	351152	351153
Nut material	CuZi vernickelt	
Overmould material	PA	

Environmental conditions

Attribute	351152	351153
Operating temperature min.	-40 °C	
Max. operating temperature	85 °C	
Min. storage temperature	-40 °C	
Max. storage temperature	85 °C	

Installation

Attribute	351152	351153
Torque for nuts	0,5 N m	

Connection

Attribute	351152	351153
Connector type	M8 Buchse gerade	M8 Stecker gerade
Cable diameter	3,5 - 5,5 mm	
Number of pins	4	
Connection type	Schraubverschluss	
Min. connection cross section	0.14 mm ²	
Max. connection cross section	0.5 mm ²	

Approvals

Attribute	351152	351153
Certified in accordance with	UL 2238/CSA22.2	