


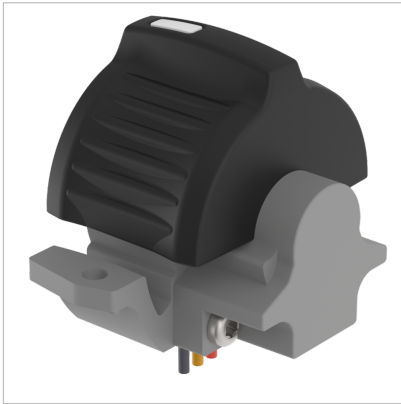

Thumbwheel 175D

Due to its flat, miniature design, illuminated thumbwheel switch 175D is ideal for use in joystick grips and the keypads of mobile machinery.


The thumbwheel can be mounted in our joystick grips 361G / 362G and 341G / 342G, for the control of operational functions, such as those on wheel loaders

Technical specifications

- Optional LED illumination of various colours
- Ergonomically adaptable by means of various actuator types
- High reliability thanks to shielded, contactless Hall technology
- IP67 electronics protection class
- Deflection: $\pm 10^\circ$ or $\pm 30^\circ$ no-detent, $\pm 20^\circ$ detent
- For wiring and signal form, select between ratiometric analogue, semi-redundant analogue and redundant analogue or digital

Technical drawing

IMAGE 1/1

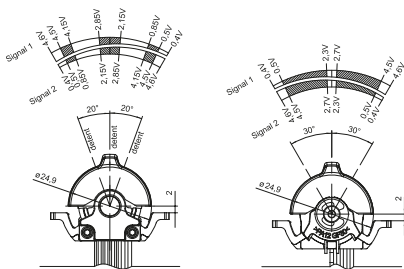

Electrical data

Attribute	175DD...	175DR...	175DT...
Max. switching voltage	24 V DC	-	-
Max. switching current	0.1 A	-	-
Polarity reversal protection	no		
Output signal min.	-	0.5 V DC	
Output signal max.	-	4.5 V DC	
Output signal	open drain	analogue	
Output signal - centre position/zero position	-	2.5 V	
Output polarity	-	opposite	
Operating voltage min.	4.5 V DC		
Operating voltage max.	5.5 V DC		
Current consumption	pro Signal max. 15 mA		
Load resistance min.	-	20000 Ohm	
Short-circuit resistance to GND	yes		
Short-circuit resistance to supply	yes		
Technology	Hall		

Mechanical data

Attribute	175DD...	175DR...	175DT...
Deflection	± 30 °	± 20 °	± 30 °
Actuation type	no detent	detent	no detent
Service life, mechanical (Cycles)	2000000		

Environmental conditions

Attribute	175DD...	175DR...	175DT...
Protection class, electronic	IP67 DIN EN 60529		
Operating temperature min.	-25 °C		
Max. operating temperature	85 °C		
Min. storage temperature	-40 °C		
Max. storage temperature	85 °C		
Shock resistance (Norm)	Frequenz 50 Hz - 100 Hz - 50 Hz, Beschleunigung 5 g, Amplitude 15 mm peak		

Installation

Attribute	175DD...	175DR...	175DT...
Installation	from below		

Connection

Attribute	175DD...	175DR...	175DT...
Cable length	0.75 m		