



Miniature float switch 2040.0

elobau miniature float switch 2040.0 with G 1" thread is used for level detection in tank monitoring, water processing and in medical applications or for lubricating oil monitoring.

At elobau, you set the standard. The miniature float switch can be fully customised using our online configurator.

Product characteristics

- Level measurement on reed-contact basis
- Mounting options: G 1"
- Material: PVC (other materials on request: PP, PVDF or PA)
- Switching voltage max. 48 V
- Contact form: N.O., N.C., changeover
- One switching point as standard
- Temperature range (PVC) from -10 °C to +65 °C max.
- IP67 protection class

Technical drawing

IMAGE 1/2

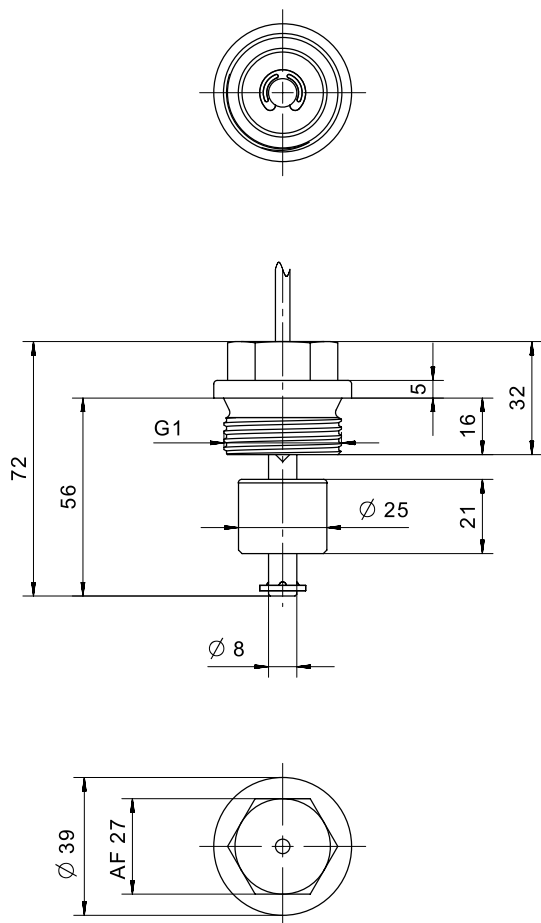


IMAGE 2/2

204010..

BN ——— WH

204020..

BN ——— WH

204030..

BK ——— BU
BN

Electrical data

Attribute	204010	204020	204030
Max. switching voltage	48 V DC		
Max. switching voltage	48 V AC		
Max. switching current	0.5 A		0.3 A
Max. switching power	10 W		3 W
Contact form	1A	1B	1C
Output signal	digital		
Technology	Reed		
Switching point function	Rising level		
Change of switching function by turning the float	yes		

Mechanical data

Attribute	204010	204020	204030
Recommended minimum density of the medium	0.7 g/cm ³		
Float diameter	25 mm		
Version	Straight		

Material information

Attribute	204010	204020	204030
Housing material	PVC		
Float material	PVC		
Riser material	PVC		
Cable material	PVC		

Environmental conditions

Attribute	204010	204020	204030
Operating temperature min.	-10 °C		
Max. operating temperature	65 °C		
Pressure resistance	3 bar		
Protection class outside container	IP67 DIN EN 60529		
Protection class inside container	IP68 DIN EN 60529		

Installation

Attribute	204010	204020	204030
Installation	from outside		
Mounting type	Thread		
Thread	G 1		
Riser diameter	8 mm		
Riser length	56 mm		
Installation opening	G 1		
Torque	20 N m		

Connection

Attribute	204010	204020	204030
Connector type	-		
Cable length	1 m		