

Battery Pack for Wireless Encoders (Ex ia IIC certified)

Battery - **S**

Material:

S = Stainless Steel



Technical Data (General)

Housing:

Operating Temp: -20C to +49C
Housing Material: Stainless Steel
IP rating: IP66
Humidity: 98% permissible
Shock: 10mg (6msec)
Vibration: 5g (500Hz)
Mounting: 1" UNS thread to Transmitter


Connection Details:

-Can be replaced by 'Hot Swapping'
-Simply unscrew the old battery and screw in the new battery.
-1" UNS thread to connect with Transmitter

Battery Type and Electronics:

Type: Lithium Thyonide Chloride
Life Time: About 5 years
Output: 3.5 Volts XX mA

Dimensions

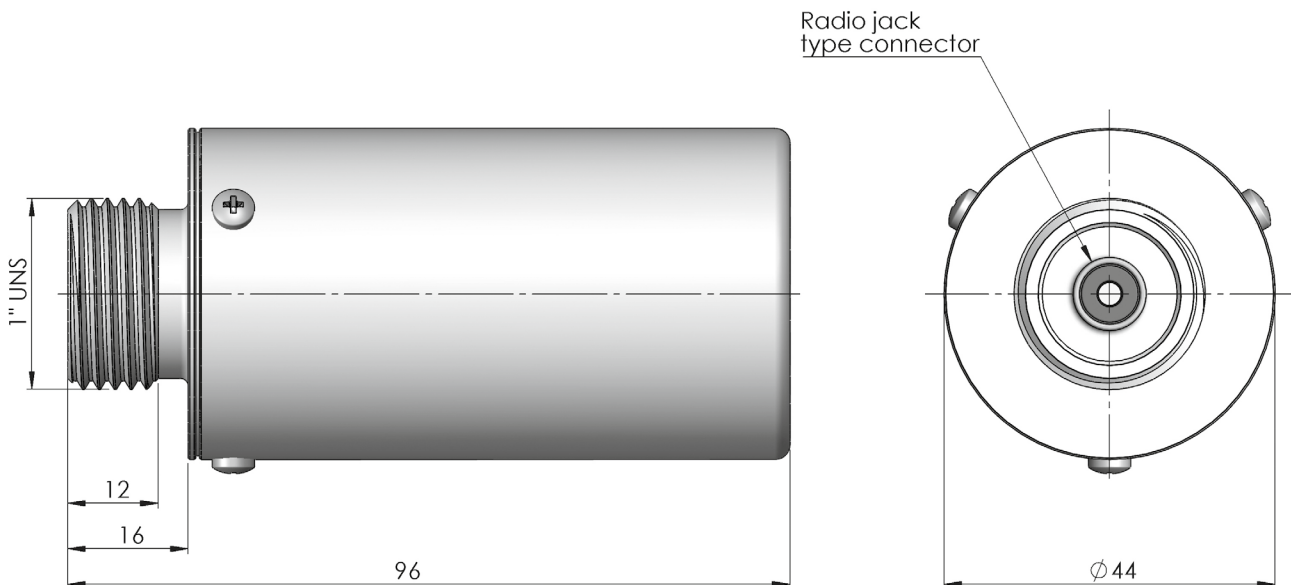

All quotes in mm