

# Motor Feedback Systems for servo motors

**Compact Motor-Line, optical / magnetic**

**Sendix S3674 (singleturn) / S3684 (multiturn)**

**RS485 + SinCos / BiSS + SinCos**



The Sendix S36 encoder with optical singleturn and magnetic multiturn gear stands out with its combination of robustness and variants diversity with compact dimensions.

With a size of 36.5 x 37 mm, it features a tapered shaft or an 8 mm hub shaft. Its highly accurate optical electronics achieve a resolution of max. 23 bits. The incremental SinCos interface is available with max. 2048 ppr.



**RS485**



Temperature range



Shock / vibration resistant



Safety-Lock™



High shaft load capacity



SinCos



Short-circuit proof



Reverse polarity protection

## Reliable and insensitive

- Robust construction for optimal functionality in the servo motor.
- Wide temperature range of -30 ... +120°C – designed specially for operation in servo motors.
- Special connector concept for fast and easy commissioning.

## Performance-optimized

- Standard RS485 interface (Hiperface® 1) compatible) + SinCos for use in many standard servo motors.
- Highest performance thanks to max. 23-bit singleturn resolution and 1024 or 2048 ppr SinCos.
- Mechanically suitable for mounting on standard servo motors.

## Order code

**8.S36X4.XX11.XXXX.XXX**  
Type **a** **b** **c** **d** **e** **f** **g** **h** **i** 2)

### a Version

- 7 = singleturn**
- 8 = multiturn (12 bits)**

### b Flange

- 1 = with stator coupling, ø 38 mm [1.50"]**
- 4 = with stator coupling, ø 60 mm [2.36"]**

### c Shaft

- 1 = hub shaft, ø 8 mm [0.32"] 2)**
- 2 = tapered shaft, ø 8 mm [0.32"]**

### d Power supply

- 1 = 7 ... 30 V DC**
- 2 = 5 V DC**

### e Type of connection

- 1 = PCB connector radial**

### f Digital interface

- 1 = BiSS**
- 2 = RS485 (Hiperface® 1) compatibel)**

### g Incremental interface

- 1 = 1024 ppr SinCos**
- A = none**

### h Resolution singleturn

- 12 = 12 bits**
- 15 = 15 bits**
- 16 = 16 bits**
- 17 = 17 bits**
- 19 = 19 bits**
- 21 = 21 bits**
- 23 = 23 bits**

### i Safety technology

- FS2 = SIL2 / PLd 2)**

### Optional on request

- other stator coupling
- 2048 ppr SinCos

## Connection technology

Order no.

### Cordsets, pre-assembled

for BiSS + SinCos

Cordset, 8-core  
PCB connector (female contacts) + single-ended  
0.5 m single wires

**8.0000.D111.0M50**

for RS485 + SinCos

Cordset, 10-core  
PCB connector (female contacts) + single-ended  
0.5 m single wires

**8.0000.D112.0M50**

for BiSS fully digital

Cordset, 6-core  
PCB connector (female contacts) + single-ended  
0.5 m single wires

**8.0000.D113.0M50**

1) Hiperface® is a registered trademark of Sick Stegmann GmbH.

2) On request.

# Motor Feedback Systems for servo motors

<b>Compact Motor-Line, optical / magnetic</b>	<b>Sendix S3674 (singleturn) / S3684 (multiturn)</b>	<b>RS485 + SinCos / BiSS + SinCos</b>
---	--	---------------------------------------

## Technical data

Mechanical characteristics	
<b>Maximum speed</b>	12000 min <sup>-1</sup> (short-term) 9000 min <sup>-1</sup> (continuous)
<b>Starting torque at 20°C [68°F]</b>	< 0.004 Nm
<b>Load capacity of shaft</b>	radial 40 N axial 20 N
<b>Weight</b>	approx. 0.1 kg [35.27 oz]
<b>Protection acc. to EN 60529</b>	IP40
<b>Working temperature range</b>	-30°C ... +120°C [-22°F ... +248°F]
<b>Materials</b>	shaft stainless steel flange aluminum housing zinc die-cast
<b>Shock resistance acc. EN 60068-2-27</b>	1000 m/s <sup>2</sup> , 6 ms
<b>Vibration resistance acc. EN 60068-2-6</b>	500 m/s <sup>2</sup> , 10 ... 2000 Hz

Electrical characteristics	
<b>Power supply</b>	7 ... 30 V DC      5 V DC
<b>Current consumption (no load)</b>	max. 90 mA      max. 150 mA
<b>Reverse polarity protection of the power supply</b>	yes
<b>Short circuit proof outputs</b>	yes <sup>2)</sup>
<b>Absolute accuracy</b>	±45 arcseconds <sup>3)</sup>
<b>Repetition accuracy</b>	±7 arcseconds <sup>3)</sup>
<b>CE compliant acc. to</b>	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

BiSS interface	
<b>Output driver</b>	RS485 transceiver type
<b>Permissible load / channel</b>	max. +/- 30 mA
<b>Signal level</b>	HIGH min. 2.4 V LOW at I <sub>Last</sub> = 20 mA max. 0.4 V
<b>Resolution singleturn</b>	12 ... 19 bit
<b>Number of revolutions (multiturn)</b>	12 bit
<b>Code</b>	binary
<b>Clock rate BiSS</b>	50 kHz ... 10 MHz
<b>Max. update rate</b>	< 10 μs, depends on the clock rate and the data length

RS485 interface (Hiperface <sup>®</sup> 1) compatible	
<b>Output driver</b>	RS485 transceiver type
<b>Permissible load / channel</b>	max. +/- 30 mA
<b>Signal level</b>	HIGH min. 2.4 V LOW at I <sub>Last</sub> = 20 mA max. 0.4 V
<b>Resolution singleturn</b>	12 ... 19 bit
<b>Number of revolutions (multiturn)</b>	12 bit
<b>Code</b>	binary

Incremental outputs SinCos (A/B)	
<b>Max. frequency -3dB</b>	400 kHz
<b>Signal level</b>	1 V <sub>ss</sub> (± 20%)
<b>Short circuit proof</b>	yes <sup>2)</sup>
<b>Pulse rate</b>	1024 ppr

### For variants with safety technology:

Notes regarding "Functional Safety"	
These encoders are suitable for use in safety-related systems up to SIL2 acc. to EN 61800-5-2 and PLd to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality. Additional functions can be found in the operating manual.	

Safety characteristics	
<b>Classification</b>	PLd / SIL2
<b>System structure</b>	2 channel (Cat. 3)
<b>PFH<sub>d</sub> value<sup>4)</sup></b>	tbd
<b>Mission time / Proof test interval</b>	20 years
<b>Relevant standards</b>	EN ISO 13849-1:2008; EN ISO 13849-2:2013; EN 61800-5-2:2007

Achievable safety subfunctions	
<b>Safe Standstill</b>	SS1, SS2, SOS
<b>Safe Motion</b>	SLS, SSR, SDI, SLA, SAR
<b>Safe Monitoring</b>	SSM

1) Hiperface<sup>®</sup> is a registered trademark of Sick Stegmann GmbH.  
 2) Short circuit proof to 0 V or to output when power supply correctly applied.  
 3) Error limits for evaluation of SinCos signals (with relaxed torque stop).

4) The specified value is based on a diagnostic coverage of 90 %, that must be achieved with an encoder evaluation unit.  
 The encoder evaluation unit must meet at least the requirements for SIL2.

# Motor Feedback Systems for servo motors

<b>Compact Motor-Line, optical / magnetic</b>	<b>Sendix S3674 (singleturn) / S3684 (multiturn)</b>	<b>RS485 + SinCos / BiSS + SinCos</b>
---	--	---------------------------------------

## Terminal assignment

Digital interface	Incremental interface	Type of connection	PCB connector (male contact), 10-pin										
1 (BiSS)	1 (SinCos)	1	Signal:	0 V	+V	D+	D-	C+	C-	A	$\bar{A}$	B	$\bar{B}$
			Pin:	1	2	3	4	5	6	7	8	9	10
suitable pre-assembled cordset, 10-core (8.0000.D112.0M50)			Core color:	BU	RD	GY	GN	YE	VT	PK	BK	WH	BN


Digital interface	Incremental interface	Type of connection	PCB connector (male contact), 10-pin										
2 (RS485)	1 (SinCos)	1	Signal:	0 V	+V	D+	D-	-	-	A	$\bar{A}$	B	$\bar{B}$
			Pin:	1	2	3	4	5	6	7	8	9	10
suitable pre-assembled cordset, 8-core (8.0000.D111.0M50)			Core color:	BU	RD	GY	GN	-	-	PK	BK	WH	BN

Digital interface	Incremental interface	Type of connection	PCB connector (male contact), 10-pin										
1 (BiSS)	A (without)	1	Signal:	0 V	+V	D+	D-	C+	C-	-	-	-	-
			Pin:	1	2	3	4	5	6	7	8	9	10
suitable pre-assembled cordset, 6-core (8.0000.D113.0M50)			Core color:	BU	RD	GY	GN	YE	VT	-	-	-	-

- +V: Encoder power supply +V DC
- 0 V: Encoder power supply ground GND (0 V)
- D+, D-: Data signal
- C+, C-: Clock signal
- A,  $\bar{A}$ : Incremental output channel A (cosine)
- B,  $\bar{B}$ : Incremental output channel B (sine)

### Top view of mating side, male contact base

Type of connection 1  
Molex IllumiMate™ (male contact)  
single row, 10-pin (104091-1020)



# Motor Feedback Systems for servo motors

<b>Compact Motor-Line, optical / magnetic</b>	<b>Sendix S3674 (singleturn) / S3684 (multiturn)</b>	<b>RS485 + SinCos / BiSS + SinCos</b>
---	--	---------------------------------------

## Dimensions


Dimensions in mm [inch]

### Flange with stator coupling, $\varnothing$ 38 [1.50]

#### Flange type 1


(with tapered shaft 2 and PCB connector)

- 1 Recommended torque (SW 2.5)  
typ. 1 Nm
- 2 Pitch circle diameter
- 3 Envelope circle diameter

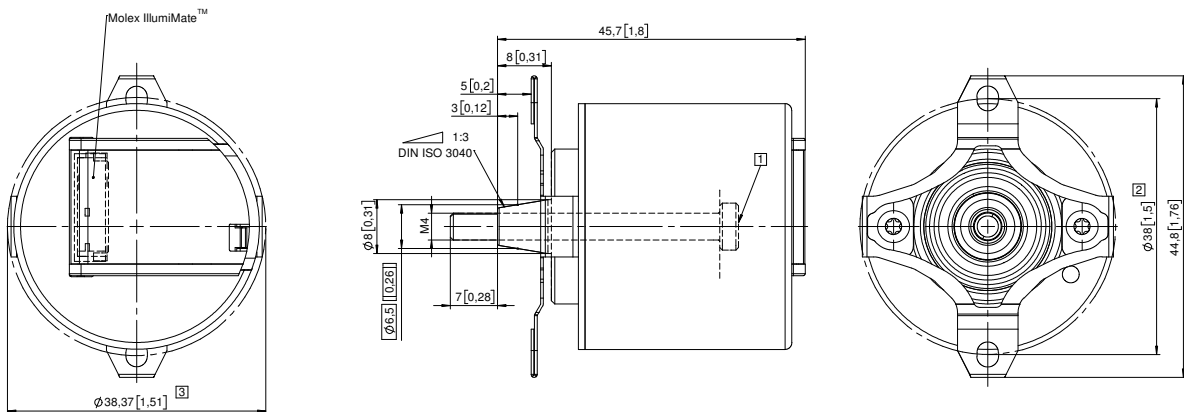

## Mounting suggestion

\* The tolerance size reduces the permissible shaft movement (see technical data).  
General tolerances according to DIN ISO 2768-mk.

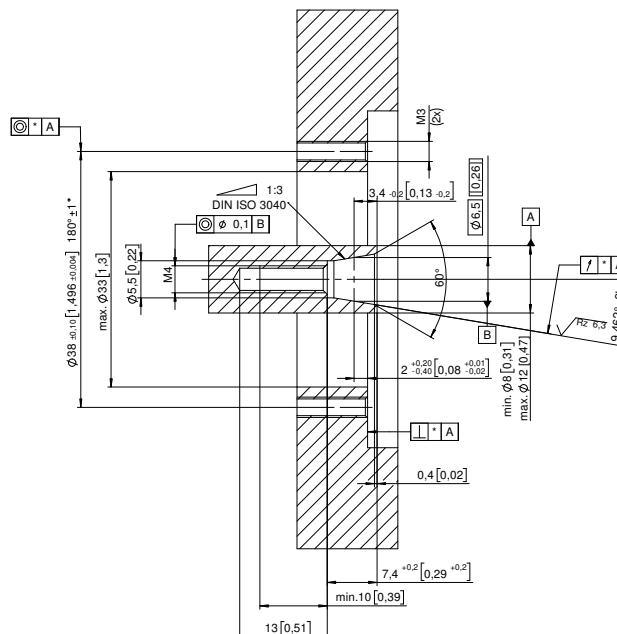

# Motor Feedback Systems for servo motors

**Compact  
Motor-Line, optical / magnetic**

**Sendix S3674 (singleturn) / S3684 (multiturn)**

**RS485 + SinCos / BiSS + SinCos**

## Dimensions


Dimensions in mm [inch]

**Flange with stator coupling,  $\varnothing$  60 [2.36]**

**Flange type 4**


(with tapered shaft 2 and PCB connector)

- 1 Recommended torque (SW 2.5)  
typ. 1 Nm
- 2 Pitch circle diameter
- 3 Envelope circle diameter

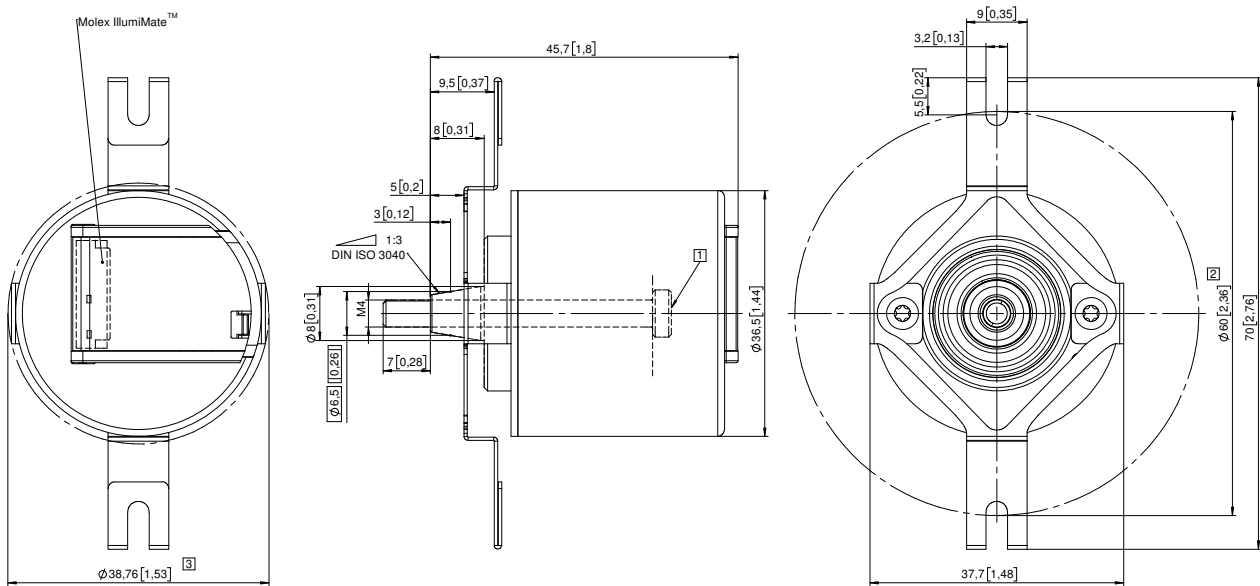

## Mounting suggestion

\* The tolerance size reduces the permissible shaft movement (see technical data).  
General tolerances according to  
DIN ISO 2768-mk.

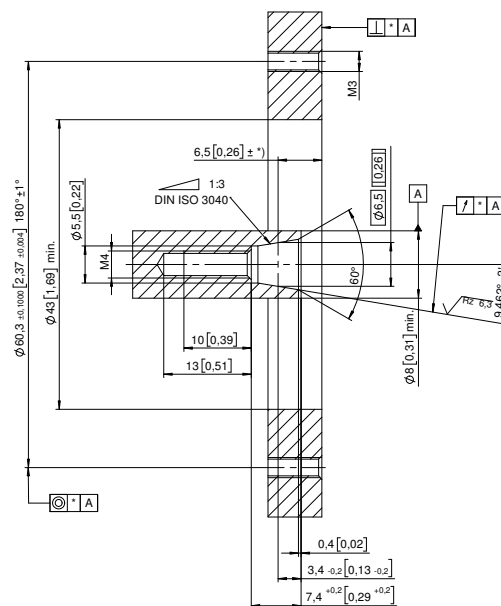

## Note:

We recommend hexagon socket head screws for fastening the stator coupling.

The hexagon keys to be used must comply with DIN ISO 2936 L (index L = long version) with ball head.

The ball head makes access easier, in particular for hardly accessible screws, and allows working up to an angle of 25°.