



**Part no.: 50114203**  
**IS 240PP/22-4E0**  
**Inductive switch**



Figure can vary

## Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes

Part no.: 50114203 – IS 240PP/22-4E0 – Inductive switch

## Technical data

| <b>Basic data</b>                    |   |
|--------------------------------------|---|
| Series                               | 240   |
| Typ. operating range limit $S_n$     | 4 mm  |
| Operating range $S_a$                | 0 ... 3.2 mm  |
| <b>Special design</b>                |   |
| Special design                       | Antivalent  |
| <b>Characteristic parameters</b>     |   |
| MTTF                                 | 1,530 years   |
| <b>Electrical data</b>               |   |
| Protective circuit                   | Short circuit protected<br>Inductive protection<br>Polarity reversal protection                   |
| <b>Performance data</b>              |   |
| Supply voltage $U_B$                 | 10 ... 30 V, DC   |
| Residual ripple                      | 0 ... 20 %, From $U_B$  |
| Open-circuit current                 | 0 ... 10 mA   |
| Repeatability, max. (in % of $S_r$ ) | 10 %, For $U_B = 20 \dots 30$ V DC, ambient temperature<br>$T_a = 23 \text{ °C} \pm 5 \text{ °C}$ |
| Switching hysteresis                 | 5 %   |
| <b>Outputs</b>                       |   |
| Number of digital switching outputs  | 2 Piece(s)  |
| <b>Switching outputs</b>             |   |
| Voltage type                         | DC  |
| Switching current, max.              | 250 mA  |
| Switching voltage                    | low: $\leq 2.5$ V   |
| Residual current, max.               | 0.1 mA  |
| Voltage drop                         | 2.5 V   |
| <b>Switching output 1</b>            |   |
| Switching element                    | Transistor, NPN   |
| Switching principle                  | NO (normally open)  |
| <b>Switching output 2</b>            |   |
| Switching element                    | Transistor, NPN   |
| Switching principle                  | NC (normally closed)  |
| <b>Timing</b>                        |   |
| Switching frequency                  | 1,400 Hz  |
| Readiness delay                      | 300 ms  |
| <b>Connection</b>                    |   |
| Number of connections                | 1 Piece(s)  |

**Part no.: 50114203 – IS 240PP/22-4E0 – Inductive switch**
**Connection 1**

|                      |                              |
|----------------------|------------------------------|
| Type of connection   | Cable                        |
| Function             | Voltage supply<br>Signal OUT |
| Cable length         | 2,000 mm                     |
| Sheathing material   | PVC                          |
| Cable color          | Black                        |
| Number of conductors | 4 -wire                      |
| Wire cross section   | 0.5 mm <sup>2</sup>          |

**Mechanical data**

|                          |  |
|--------------------------|--|
| Design                   | Cubic                                      |
| Dimension (W x H x L)    | 12 mm x 40 mm x 26 mm                      |
| Type of installation     | Embedded                                   |
| Housing material         | Plastic, PA 66                             |
| Sensing face material    | Plastic, Polyamide (PA 66)                 |
| Net weight               | 110 g                                      |
| Housing color            | Black<br>Red, RAL 3000                     |
| Type of fastening        | Fastening on back<br>Through-hole mounting |
| Standard measuring plate | 12 x 12 mm <sup>2</sup> , Fe360            |

**Operation and display**

|                 |            |
|-----------------|------------|
| Type of display | LED        |
| Number of LEDs  | 1 Piece(s) |

**Environmental data**

|                                |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -25 ... 70 °C |
| Ambient temperature, storage   | -25 ... 70 °C |

**Certifications**

|  |   |
|--|---|
| Degree of protection                               | IP 67   |
| Protection class                                   | II  |
| Certifications                                     | c UL US   |
| Test procedure for EMC in accordance with standard | IEC 61000-4-3<br>IEC 61000-4-4<br>IEC 61000-4-2 |
| Standards applied                                  | IEC 60947-5-2                                   |

**Correction factors**

|                 |      |
|-----------------|------|
| Aluminum        | 0.4  |
| Stainless steel | 0.8  |
| Copper          | 0.45 |
| Brass           | 0.55 |
| Fe360 steel     | 1    |

**Classification**

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| eCl@ss 8.0            | 27270101 |
| eCl@ss 9.0            | 27270101 |

ETIM 5.0


EC002714

ETIM 6.0

EC002714

## Dimensioned drawings

All dimensions in millimeters

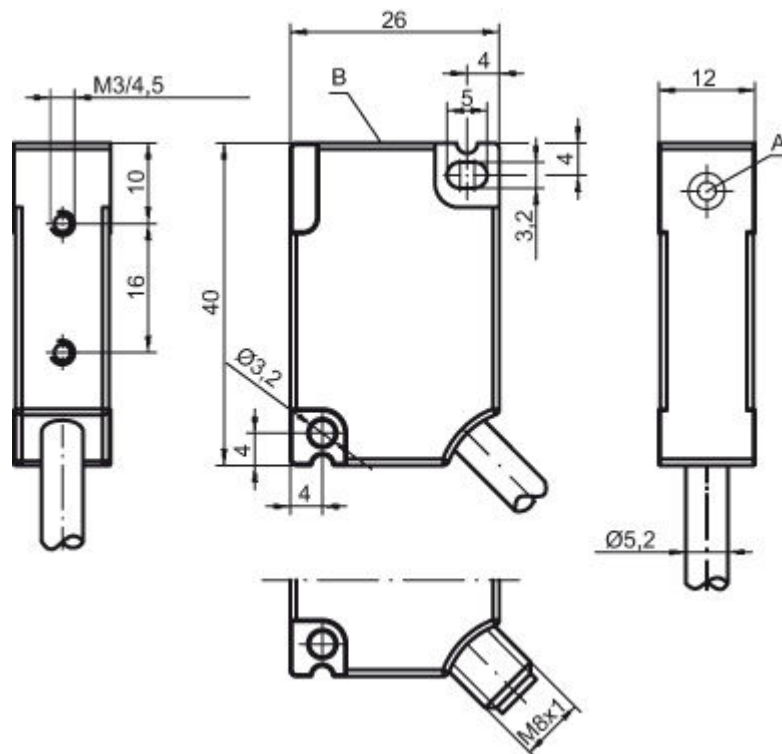

A Active surface

B Yellow LED

## Electrical connection


| Connection 1         |                              |
|----------------------|------------------------------|
| Type of connection   | Cable                        |
| Function             | Voltage supply<br>Signal OUT |
| Cable length         | 2,000 mm                     |
| Sheathing material   | PVC                          |
| Cable color          | Black                        |
| Number of conductors | 4 -wire                      |
| Wire cross section   | 0.5 mm <sup>2</sup>          |

| Conductor color | Conductor assignment |
|-----------------|----------------------|
| Brown           | V+                   |
| White           | OUT 2                |

| Conductor color | Conductor assignment |
|-----------------|----------------------|
| Blue            | GND                  |
| Black           | OUT 1                |


## Diagrams

### Embedded installation

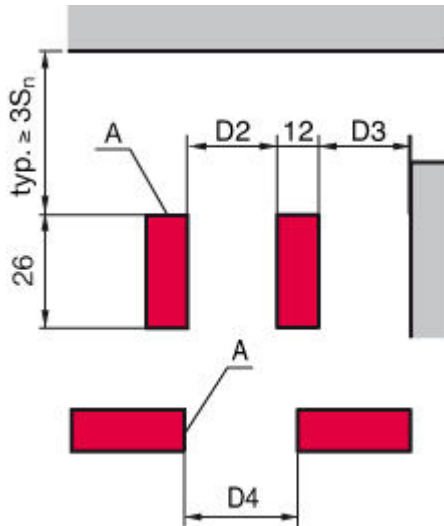

|            |    |
|------------|----|
| $S_n$ [mm] | 4  |
| $D_1$ [mm] | 0  |
| $D_2$ [mm] | 0  |
| $D_3$ [mm] | 0  |
| $D_4$ [mm] | 20 |

### Typical approach curve

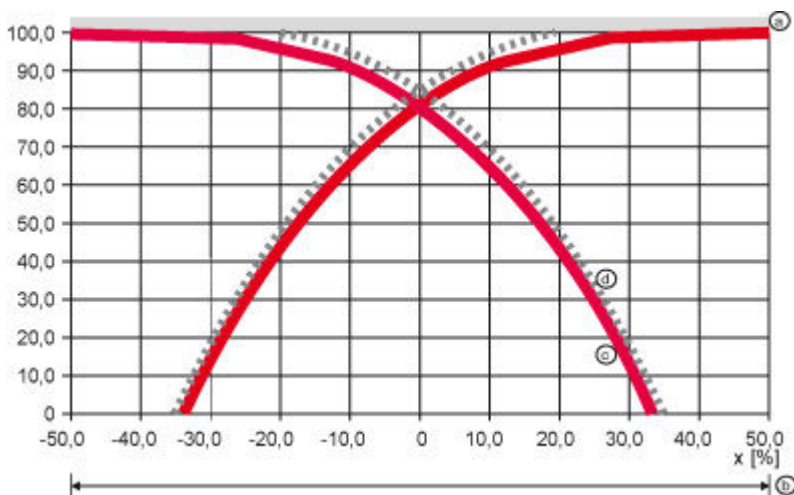

- a Standard measuring plate
- b Diameter of the active surface
- c Switching point
- d Hysteresis

Part no.: 50114203 – IS 240PP/22-4E0 – Inductive switch

## Operation and display

### LEDs

| LED | Display                  | Meaning                          |
|-----|--------------------------|----------------------------------|
| 1   | Yellow, continuous light | Switching output/switching state |

## Part number code

Part designation: ISX YYY ZZ/AAA.BB-CCC-DDD-DDD

|     |   |
|-----|---|
| ISX | <b>Operating principle / construction:</b><br>IS: inductive switch, standard design<br>ISS: inductive switch, short construction  |
| YYY | <b>Series:</b><br>203: series with Ø 3 mm<br>204: series with Ø 4 mm<br>205: series with M5 x 0.5 external thread<br>206: series with Ø 6.5 mm<br>208: series with M8 x 1 external thread<br>212: series with M12 x 1 external thread<br>218: series with M18 x 1 external thread<br>230: series with M30 x 1.5 external thread<br>240: series in cubic design<br>244: series in cubic design<br>255: series with 5 x 5 mm <sup>2</sup> cross section<br>288: series with 8 x 8 mm <sup>2</sup> cross section   |
| ZZ  | <b>Housing / thread:</b><br>MM: metal housing (active surface: plastic) / metric thread<br>FM: full-metal housing (active surface: stainless steel AISI 316L) / metric thread<br>MP: metal housing (active surface: plastic) / smooth (without thread)  |
| AAA | <b>Output current / supply:</b><br>4NO: PNP transistor, NO contact<br>4NC: PNP transistor, NC contact<br>2NO: NPN transistor, NO contact<br>2NC: NPN transistor, NC contact<br>1NO: relay, NO contact / AC/DC<br>1NC: relay, NC contact / AC/DC<br>44: 2 PNP transistor switching outputs, antivalent (NO + NC)<br>22: 2 NPN transistor switching outputs, antivalent (NO + NC)   |
| BB  | <b>Special equipment:</b><br>n/a: no special equipment<br>5F: food version<br>5: housing material V2A (1.4305, AISI 303)  |
| CCC | <b>Measurement range / type of installation:</b><br>1E0: typ. range limit 1.0 mm / embedded installation<br>1E5: typ. range limit 1.5 mm / embedded installation<br>2E0: typ. range limit 2.0 mm / embedded installation<br>3E0: typ. range limit 3.0 mm / embedded installation<br>4E0: typ. range limit 4.0 mm / embedded installation<br>5E0: typ. range limit 5.0 mm / embedded installation<br>6E0: typ. range limit 6.0 mm / embedded installation<br>8E0: typ. range limit 8.0 mm / embedded installation<br>10E: typ. range limit 10.0 mm / embedded installation<br>12E: typ. range limit 12.0 mm / embedded installation<br>15E: typ. range limit 15.0 mm / embedded installation<br>20E: typ. range limit 20.0 mm / embedded installation<br>22E: typ. range limit 22.0 mm / embedded installation<br>2N5: typ. range limit 2.5 mm / non-embedded installation<br>4N0: typ. range limit 4.0 mm / non-embedded installation<br>8N0: typ. range limit 8.0 mm / non-embedded installation<br>10N: typ. range limit 10.0 mm / non-embedded installation<br>12N: typ. range limit 12.0 mm / non-embedded installation<br>14N: typ. range limit 14.0 mm / non-embedded installation<br>15N: typ. range limit 15.0 mm / non-embedded installation<br>20N: typ. range limit 20.0 mm / non-embedded installation<br>22N: typ. range limit 22.0 mm / non-embedded installation<br>25N: typ. range limit 25.0 mm / non-embedded installation<br>40N: typ. range limit 40.0 mm / non-embedded installation |
| DDD | <b>Electrical connection:</b><br>n/a: cable, standard length 2000 mm<br>S12: M12 connector, 4-pin, axial<br>200-S12: cable, length 200 mm with M12 connector, 4-pin, axial<br>200-S8.3: cable, length 200 mm with M8 connector, 3-pin, axial<br>S8.3: M8 connector, 3-pin, axial<br>005-S8.3: cable, length 500 mm with M8 connector, 3-pin, axial  |

Part no.: 50114203 – IS 240PP/22-4E0 – Inductive switch

**Note**

A list with all available device types can be found on the Leuze electronic website at [www.leuze.com](http://www.leuze.com).

## Notes

**Observe intended use!**

- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

**For UL applications:**

- For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).