



Part no.: 50134313
MSI 420.F50-01
Safety control



Figure can vary

Contents

- . Technical data
- . Dimensioned drawings
- . Electrical connection
- . Circuit diagrams
- . Notes
- . Accessories

Technical data

Basic data	
Series	MSI 420
Application	Monitoring of safety functions and press sequence control
Number of safe I/Os	16 IN, 4 OUT, 4 programmable I/O
Functions	
Functions	Additional functionality for the sequence control of eccentric and hydraulic presses Additional I/O extensions available (optional) Configurable safety control Configuration via MSI.designer software Ethernet interface Removable program memory (must be ordered separately, part no. 50132996) Transfer of diagnostic data via external fieldbus modules, e.g. MSI-FB-PROFIBUS (optional) USBmini interface
Characteristic parameters	
SIL	3 , IEC 61508
SILCL	3 , IEC/EN 62061
Performance Level (PL)	Up to and including e , EN ISO 13849-1
PFH _D	0.0000000043 per hour
PFH _D	4,3E-09 per hour
Mission time T _M	20 years , EN ISO 13849-1
Category	4 , EN ISO 13849
Electrical data	
Performance data	
Supply voltage U _B	24 V , DC , -30 ... 25 %
Power consumption, max.	3.3 W
Output circuit	
Number of outputs	8 Piece(s)
Max. number of integrated digital outputs	8 Piece(s)
Type of digital output	Transistor
Short circuit protection, outputs	Yes
Min. voltage permitted at the output	16.2 V
Max. voltage permitted at the output	30 V
Output current	4 A
Control circuit	
Number of inputs	16 Piece(s)
Voltage permitted at the input	30 V
Max. rated control supply voltage at DC	30 V
Min. rated control supply voltage at DC	15.6 V
Input current at signal 1	2.3 mA
Interface	
Type	Internal bus (SBUS+)
Service interface	
Type	Ethernet USB

Part no.: 50134313 – MSI 420.F50-01 – Safety control

Ethernet

Function Configuration via software

USB

Function Configuration via software

Connection

Number of connections 3 Piece(s)

Connection 1

Type of connection Terminal

Function Signal IN
Signal OUT
Voltage supply

Type of terminal Screw terminal

No. of pins 32 -pin

Connection 2

Type of connection USB

Function Configuration interface

Connector type USB 2.0 Mini-A

Connection 3

Type of connection RJ45

Function BUS OUT

Cable properties

Connection cross sections
 1 x 0.2 to 2.5 mm², wire
 1 x 0.2 to 2.5 mm², wire
 1 x 0.25 to 2.5 mm², wire with wire-end sleeve
 2 x 0.2 to 1.0 mm², wire
 2 x 0.2 to 1.0 mm², wire
 2 x 0.25 to 1.0 mm², wire with wire-end sleeve

Mechanical data

Dimension (W x H x L) 45 mm x 96.5 mm x 121 mm

Net weight 290 g

Housing color Gray

Type of fastening Snap-on mounting

Operation and display

Type of display LED indicator

Type of configuration Software

Environmental data

Ambient temperature, operation -25 ... 65 °C

Ambient temperature, storage -25 ... 70 °C

Relative humidity (non-condensing) 10 ... 95 %

Certifications

Degree of protection IP 20

Protection class III

Certifications c UL US
TÜV Rheinland

Vibration resistance 5 ... 150 Hz

Test procedure for oscillation in accordance with standard EN 60068-2-6

Shock resistance, single shock 30 g, 11 ms, EN 60068-2-27

Part no.: 50134313 – MSI 420.F50-01 – Safety control


Shock resistance, continuous shock 10 g, 16 ms, EN 60068-2-29

Classification

Customs tariff number	85371091
eCl@ss 8.0	27243101
eCl@ss 9.0	27243101
ETIM 5.0	EC002538
ETIM 6.0	EC002538

Dimensioned drawings

All dimensions in millimeters

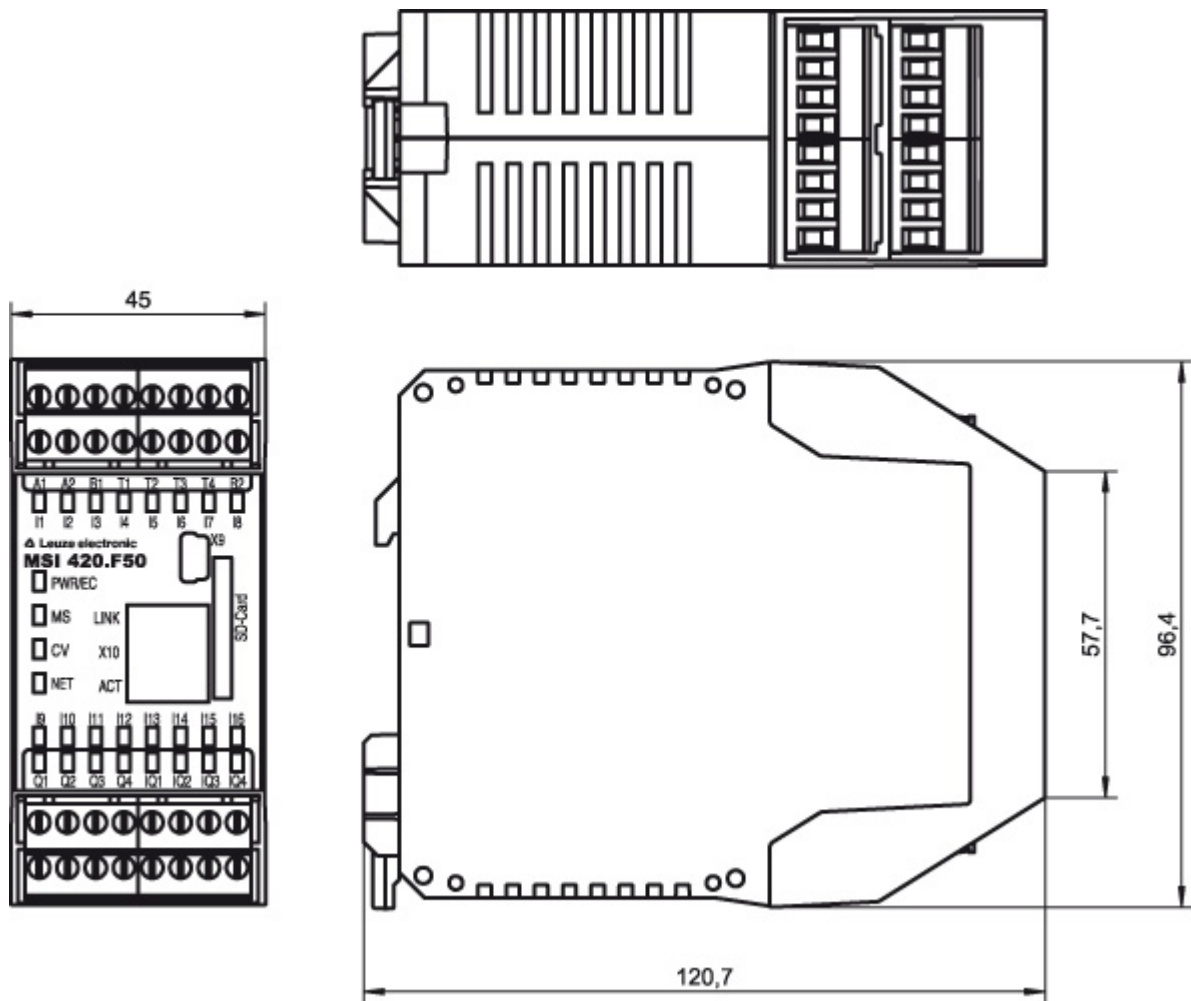

Electrical connection

Connection 1	
Type of connection	Terminal
Function	Signal IN Signal OUT Voltage supply

Part no.: 50134313 – MSI 420.F50-01 – Safety control


Connection 1	
Type of terminal	Screw terminal
No. of pins	32 -pin

Terminal	Assignment
A1	+24V
A2	GND
B1	+24 V (outputs Q1 - Q4)
B2	+24 V (outputs IQ1 - IQ4)
I1	Safe input
I2	Safe input
I3	Safe input
I4	Safe input
I5	Safe input
I6	Safe input
I7	Safe input
I8	Safe input
I9	Safe input
I10	Safe input
I11	Safe input
I12	Safe input
I13	Safe input
I14	Safe input
I15	Safe input
I16	Safe input
IQ1	Safe input/output (configurable)
IQ2	Safe input/output (configurable)
IQ3	Safe input/output (configurable)
IQ4	Safe input/output (configurable)
Q1	Safe output
Q2	Safe output
Q3	Safe output
Q4	Safe output
T1	Test signal output
T2	Test signal output
T3	Test signal output
T4	Test signal output

Connection 2		X9
Type of connection	USB	
Function	Configuration interface	
Connector type	USB 2.0 Mini-A	

Connection 3		X10
Type of connection	RJ45	
Function	BUS OUT	

Circuit diagrams

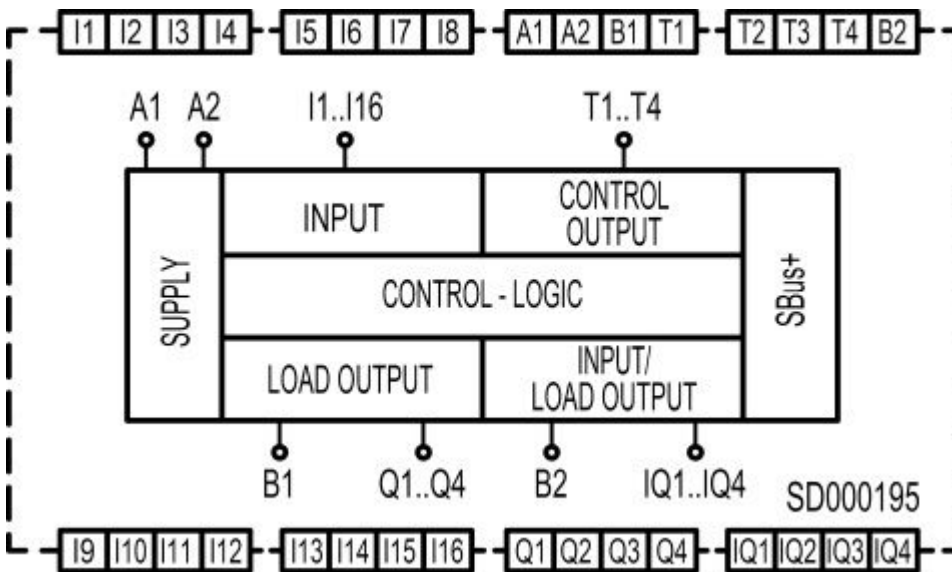


Notes

Observe intended use!


- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

Accessories


Start-up/diagnosis

	Part no.	Designation	Article	Description
	50117011	KB USB A - USB miniB	Service line	Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,500 mm Sheathing material: PVC

General



	Part no.	Designation	Article	Description
	50132996 *	MSI-SD-CARD	Program memory	

Part no.: 50134313 – MSI 420.F50-01 – Safety control

	Part no.	Designation	Article	Description
	50133002	MSI-SD-COVER	Cover	Contains: 10x MSI-SD-COVER

* Necessary accessories, please order separately

Services

	Part no.	Designation	Article	Description
	S981043	CS40-E-312	Hourly rate for "Safety Engineering"	Details: Location and content to be agreed upon. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and, if applicable, according to expenditure.
	S981029	CS40-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.