



Part no.: 50135253
KDS PB-M12-4A-M12-4A-P3-020
Interconnection cable



Figure can vary

Contents

- Technical data
- Electrical connection
- Circuit diagrams

Technical data

Basic data

Suitable for interface PROFIBUS DP

Electrical data

Performance data

Operating voltage 60 V DC

Connection

Connection 1

Type of connection	Connector
Thread size	M12
Type	Female
Handle body material	PUR
No. of pins	5 -pin
Encoding	B-coded
Design	Axial
Lock	Screw fitting, nickel-plated diecast zinc, recommended torque 0.6 Nm, self-locking

Connection 2

Type of connection	Connector
Thread size	M12
Type	Male
Handle body material	PUR
No. of pins	4 -pin
Encoding	B-coded
Design	Axial
Lock	Screw fitting, nickel-plated diecast zinc, recommended torque 0.6 Nm, self-locking

Cable properties

Number of conductors	2 Piece(s)
Wire cross section	0.64 mm ²
AWG	19
Sheathing color	Violet
Shielded	Yes
Silicone-free	Yes
Cable design	Interconnection cable
Cable diameter (external)	7.7 mm
Cable length	2,000 mm
Sheathing material	PUR
Wire insulation	PE
Suitability for drag chains	Yes
Properties of the outer sheathing	Free of CFC, cadmium, silicone, halogen and lead, matt, low-adhesion, abrasion-resistant, easily machine-processable
Resistance of the outer sheathing	Hydrolysis and microbe resistant, good oil, gasoline and chemical resistance in accordance with VDE 0472 part 803 test B, flame retardant in accordance with UL 1581 VW1 / CSA FT1 / IEC 60332-1, IEC 60332-2-2

Mechanical data

Width across flats 13 mm

Part no.: 50135253 – KDS PB-M12-4A-M12-4A-P3-020 – Interconnection cable

Bending cycles	5,000,000 Piece(s)
Bending radius, flexible laying, min.	Min. 12 x cable diameter
Bending radius, stationary laying, min.	Min. 7.5 x cable diameter


Environmental data	
Ambient temperature, operation, flexible use	-20 ... 70 °C
Ambient temperature, operation, stationary use	-40 ... 80 °C

Certifications	
Degree of protection	IP 65 IP 67

Classification	
Customs tariff number	85444290
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311
ETIM 5.0	EC001855
ETIM 6.0	EC001855

Electrical connection



Connection 1	
Type of connection	Connector
Thread size	M12
Type	Female
Handle body material	PUR
No. of pins	5 -pin
Encoding	B-coded
Design	Axial
Lock	Screw fitting, nickel-plated diecast zinc, recommended torque 0.6 Nm, self-locking



Connection 2	
Type of connection	Connector
Thread size	M12
Type	Male
Handle body material	PUR
No. of pins	4 -pin
Encoding	B-coded
Design	Axial
Lock	Screw fitting, nickel-plated diecast zinc, recommended torque 0.6 Nm, self-locking

Circuit diagrams

Wiring schematic

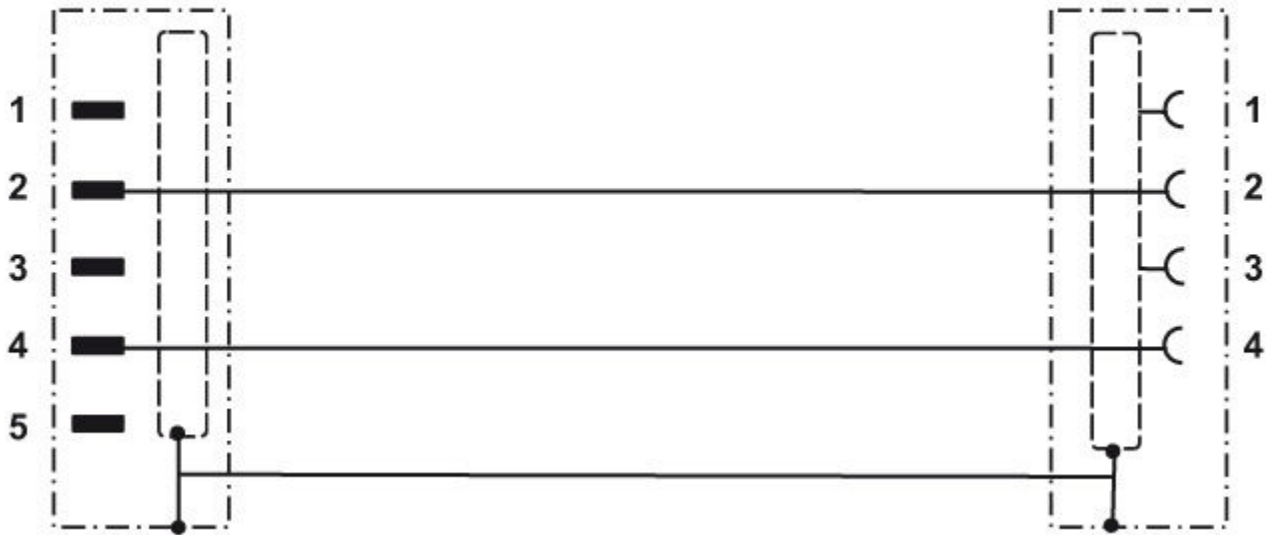

- a Green wire
- b Red wire
- c Shield