


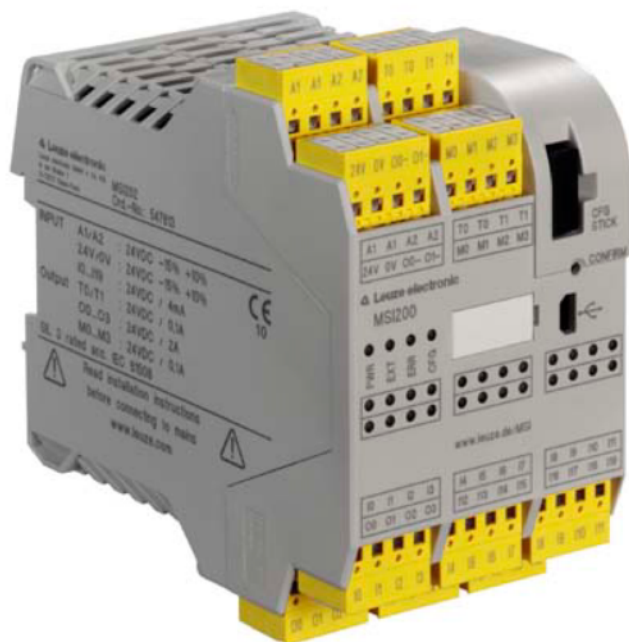

Part no.: 547813
MSI200
Safety control



Figure can vary

Contents

- Technical data
- Electrical connection
- Accessories

Part no.: 547813 – MSI202 – Safety control

Technical data

Basic data	
Series	MSI 200
Application	Monitoring of safety functions
Number of safe I/Os	20 IN, 4 OUT
Functions	
Functions	Freely configurable safety main module Monitoring of all safe functions in machines and systems Safety-oriented expandability with additional input/output modules Transfer of diagnostic data via MSI-FB fieldbus module (optional)
Characteristic parameters	
SIL	3 , IEC 61508
SILCL	3 , IEC/EN 62061
Performance Level (PL)	e , EN ISO 13849-1
MTTF _d	8,324 years , EN ISO 13849-1
PFH _D	0.0000000137 per hour
PFH _D	1.4E-08 per hour
Mission time T _M	20 years , EN ISO 13849-1
Category	4 , EN ISO 13849
Electrical data	
Protective circuit	Overvoltage protection Short circuit protected
Performance data	
Supply voltage U _B	24 V , DC , -15 ... 10 %
Current consumption (without load), max.	200 mA
Overvoltage category	III
Input data logic	
Diagnostics display	4 LEDs (green, red)
Reaction time, max.	30 ms
Nominal input voltage U _N	24 V DC , -15 ... 10 % , (A1/A2)
Typ. current consumption at U _N (A1/A2)	110 mA
Bridging of voltage drops	20 ms
Inputs	
Number of safe inputs	20 Piece(s) , (up to SIL 3 / IEC 62061)
Status indicator	20 LEDs (green)
Nominal voltage U _N	24 V DC , (to ground A1/A2)
Typ. current consumption at U _N	4 mA
Signal level at "0", max.	5 V
Signal level at "1", min.	11 V

Part no.: 547813 – MSI202 – Safety control

Outputs

Number of signal outputs	4 Piece(s)
Number of safe semiconductor outputs	4 Piece(s) , (Cat. 4 / EN ISO 13849-1 / EN 954)
Number of ground-switching outputs	2 Piece(s)
Number of cycle outputs	2 Piece(s)

Output data

Nominal voltage	24 V DC , -15 ... 10 % , (24 V / 0 V)
Status indicator	4 LEDs (green)
Limiting continuous current	2 A

Clock outputs

Nominal voltage	24 V DC , (A1/A2)
Limiting continuous current	100 mA

Signal outputs

Nominal voltage	24 V DC , (A1/A2)
Limiting continuous current	100 mA

Timing

Readiness delay	4,000 ms
Recovery time, restart, max.	5 ms

Service interface

Type	USB
------	-----

USB

Function	Configuration via software
----------	----------------------------

Connection

Number of connections	3 Piece(s)
-----------------------	------------

Connection 1

Type of connection	Terminal
Function	Connection to device Signal IN Signal OUT Voltage supply
Type of terminal	Spring-cage terminal
No. of pins	40 -pin

Connection 2

Type of connection	USB
Function	Configuration interface
Connector type	USB 2.0 Mini-A

Connection 3

Type of connection	TBUS DIN rail
Function	Internal communication interface

Cable properties

Connection cross sections	0.2 to 1.5 mm ²
---------------------------	----------------------------

Mechanical data

Dimension (W x H x L)	67.5 mm x 112 mm x 114.5 mm
Housing material	Plastic , Unreinforced polyamide PA
Net weight	430 g
Housing color	Gray

Part no.: 547813 – MSI202 – Safety control

Type of fastening	Snap-on mounting
Number of possible safe extension modules	10 Piece(s)

Environmental data

Ambient temperature, operation	-5 ... 45 °C
Ambient temperature, storage	-20 ... 70 °C

Certifications

Degree of protection	IP 20 (housing) IP 20 (terminals)
Certifications	c UL US TÜV Rheinland

Classification

Customs tariff number	85371091
eCl@ss 8.0	27371819
eCl@ss 9.0	27371819
ETIM 5.0	EC001449
ETIM 6.0	EC001449

Electrical connection

Connection 1	
Type of connection	Terminal
Function	Connection to device Signal IN Signal OUT Voltage supply
Type of terminal	Spring-cage terminal
No. of pins	40 -pin

Terminal	Assignment
A1	Supply for logic- or signal output
A1	Supply for logic- or signal output
A2	Supply for logic- or signal output
A2	Supply for logic- or signal output
T0	Test pulse output
T0	Test pulse output
T1	Test pulse output
T1	Test pulse output
24 V	Supply for safe output
0 V	Supply for safe output
O0-	Ground-switching output
O1-	Ground-switching output
M0	Signal output
M1	Signal output
M2	Signal output
M3	Signal output
I0	Safe input
I1	Safe input

Part no.: 547813 – MSI202 – Safety control

Terminal	Assignment
I2	Safe input
I3	Safe input
I4	Safe input
I5	Safe input
I6	Safe input
I7	Safe input
I8	Safe input
I9	Safe input
I10	Safe input
I11	Safe input
O0	Safe output
O1	Safe output
O2	Safe output
O3	Safe output
I12	Safe input
I13	Safe input
I14	Safe input
I15	Safe input
I16	Safe input
I17	Safe input
I18	Safe input
I19	Safe input

Connection 2	
Type of connection	USB
Function	Configuration interface
Connector type	USB 2.0 Mini-A

Connection 3	
Type of connection	TBUS DIN rail
Function	Internal communication interface

Accessories

Connection technology - Connectors

	Part no.	Designation	Article	Description
	547823	AC-MSI-TC	Accessories set	Contains: 10x MSI TBUS standard connection plug (for fieldbus gateways)
	547821	AC-MSI-TCS	Accessories set	Contains: 10x MSI TBUS safety connection plug

Part no.: 547813 – MSI202 – Safety control

Start-up/diagnosis

	Part no.	Designation	Article	Description
	50117011	KB USB A - USB miniB	Service line	Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,500 mm Sheathing material: PVC