



Figure can vary

Part no.: 63000106
S20-P4C1-M12-FH
Safety switch



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Circuit diagrams
- Accessories
- Notes

Part no.: 63000106 – S20-P4C1-M12-FH – Safety switch

Technical data

Basic data	
Series	S20
Functions	
Functions	Type 2 interlock device with mechanically actuated position switch with low-coded actuator acc. to DIN EN ISO 14119
Characteristic parameters	
Mission time T _M	20 years, EN ISO 13849-1
B10 _d	2,000,000 number of cycles
Electrical data	
Usage category at DC 13	Ue 24 V, Ie 2 A, EN 60947-5-1
Usage category at AC 15	Ue 24 V, Ie 2 A, EN 60947-5-1
Contact allocation	2NC + 1NO
Contact opening	Force-fit
Short circuit protected	500 V, 2 A, type gG, IEC 60269-1
Contact protection	Protective insulation O
Performance data	
Rated insulation voltage	30 V AC, 36 V DC
Conventional thermal current, max.	2 A
Connection	
Number of connections	1 Piece(s)
Connection 1	
Type of connection	Connector
Function	Contact connection
Thread size	M12
Material	Plastic
No. of pins	8 -pin
Mechanical data	
Design	Cubic
Dimension (W x H x L)	30.8 mm x 30.8 mm x 93 mm
Housing material	Plastic, Glass fiber reinforced (PPS), self-extinguishing
Electrical contact material	Silver alloy
Net weight	112 g
Housing color	Red Black
Type of fastening	Through-hole mounting
Switch type	Interlock device without guard interlocking, ISO 14119
Switching principle	Slow-action contact
Approach actuation directions	1 x top 4 x side (90°)
Approach speed	0 ... 0.5 m/s
Mechanical life time	1,000,000 actuation cycles, IEC 6047-5-1
Actuation frequency, max.	3,600 per hour, IEC 6047-5-1
External actuator	AC-ANxx series: straight, angled, resilient, alignable
Actuation force (pull-out)	10 N

Part no.: 63000106 – S20-P4C1-M12-FH – Safety switch

Actuating path with forced separation	7.8 mm
Recoil tolerance	4.5 mm

Environmental data

Ambient temperature, operation	-25 ... 80 °C
Degree of contamination, external	3, EN 60947-1

Certifications


Degree of protection	IP 67
Certifications	c UL US IMQ

Classification

eCl@ss 8.0	27272602
eCl@ss 9.0	27272602
ETIM 5.0	EC002592


Dimensioned drawings

All dimensions in millimeters

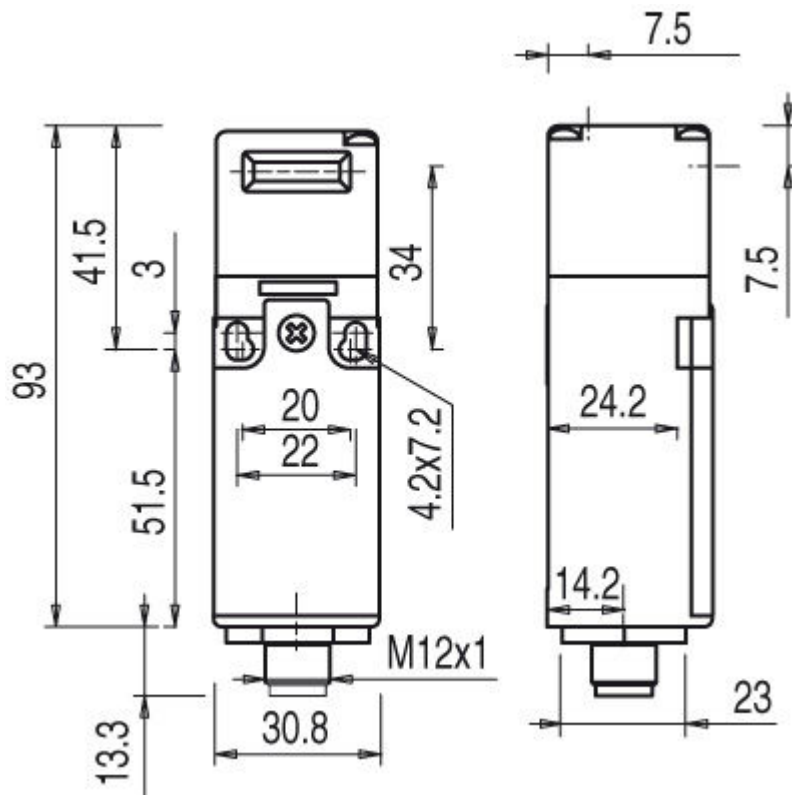

Part no.: 63000106 – S20-P4C1-M12-FH – Safety switch


Approach directions

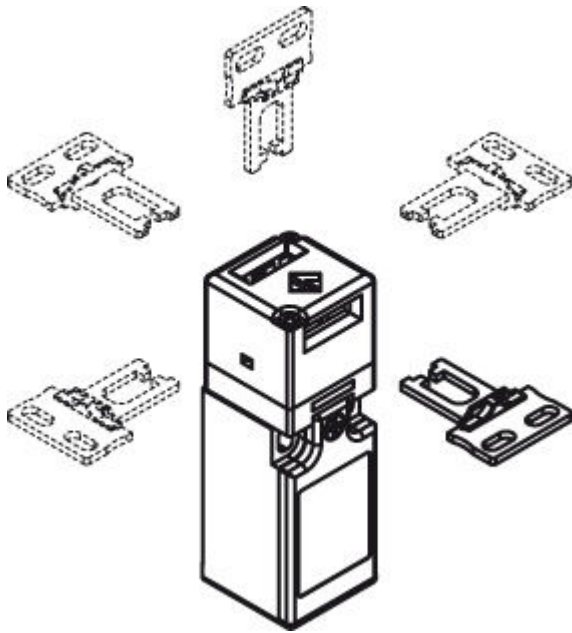

Electrical connection


Connection 1	
Type of connection	Connector
Function	Contact connection
Thread size	M12
Type	Male
Material	Plastic
No. of pins	8 -pin
Encoding	A-coded

Pin	Pin assignment
1	n.c.
2	n.c.
3	NC(1)
4	NC(1)
5	NC(2)
6	NC(2)
7	NO(1)
8	NO(1)






Part no.: 63000106 – S20-P4C1-M12-FH – Safety switch

Circuit diagrams

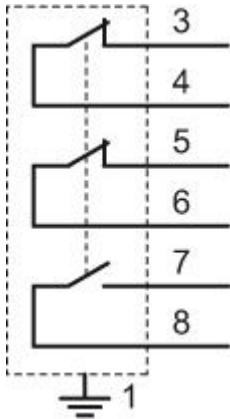

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50135129	KD S-M12-8A-P1-100	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PUR
	50135130	KD S-M12-8A-P1-150	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 15,000 mm Sheathing material: PUR
	50135131	KD S-M12-8A-P1-250	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 25,000 mm Sheathing material: PUR

Actuator

	Part no.	Designation	Article	Description
	63000701	AC-AN-A	Actuator	Dimensions: 28 mm x 11.8 mm x 30.7 mm Type of fastening: Through-hole mounting Design: Angled Area of application: Normal duty Mounting bore holes: In key direction Material: Stainless steel

Part no.: 63000106 – S20-P4C1-M12-FH – Safety switch

	Part no.	Designation	Article	Description
	63000705	AC-AN-AL	Actuator	Dimensions: 20.6 mm x 41.7 mm x 42.7 mm Type of fastening: Through-hole mounting Design: Angled Area of application: Normal duty Mounting bore holes: In key direction Material: Stainless steel
	63000707	AC-AN-ASH	Actuator	Dimensions: 53 mm x 14 mm x 29 mm Type of fastening: Through-hole mounting Design: Angled Area of application: Normal duty Mounting bore holes: In key direction Material: Stainless steel
	63000706	AC-AN-F1J2	Actuator	Dimensions: 56 mm x 16 mm x 35 mm Type of fastening: Through-hole mounting Design: Straight Area of application: Normal duty Mounting bore holes: In key direction Material: Plastic, Stainless steel Functions: Flexible, 1 direction, Adjustable, 2 directions
	63000703	AC-AN-F2J2	Actuator	Dimensions: 30 mm x 22 mm x 44 mm Type of fastening: Through-hole mounting Design: Straight Area of application: Normal duty Mounting bore holes: 90° to key direction Material: Plastic, Stainless steel Functions: Flexible, 2 directions, Adjustable, 2 directions
	63000702	AC-AN-F4	Actuator	Dimensions: 30 mm x 16 mm x 48 mm Type of fastening: Through-hole mounting Design: Straight Area of application: Normal duty Mounting bore holes: 90° to key direction Material: Plastic, Stainless steel Functions: Flexible, 4 directions
	63000700	AC-AN-S	Actuator	Dimensions: 28 mm x 9 mm x 39.8 mm Type of fastening: Through-hole mounting Design: Straight Area of application: Normal duty Mounting bore holes: 90° to key direction Material: Stainless steel
	63000704	AC-AN-SL	Actuator	Dimensions: 20.6 mm x 9 mm x 64 mm Type of fastening: Through-hole mounting Design: Straight Area of application: Normal duty Mounting bore holes: 90° to key direction Material: Stainless steel

Notes

Observe intended use!

- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.