



the sensor people





Figure can vary

Part no.: 68017115 MLC510R14-1500H/A Safety light curtain receiver













Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- · Operation and display
- Suitable transmitters
- · Part number code
- Notes
- Accessories



Technical data

Basic data	Series Device type Cascading	Receiver Host 2x BT-NC sliding block	
Device type	Device type Cascading	Receiver Host 2x BT-NC sliding block	
Cascading	Cascading	Host 2x BT-NC sliding block	
Contains		2x BT-NC sliding block	
Application Finger protection			
Characteristic parameters		- Inger protection	
Type 4 , IEC/EN 61496 SIL 3 , IEC 61508 SILCL 3 , IEC 61508 Performance Level (PL) e. EN ISO 13849-1 PFHD 7.73E-09 per hour Mission time T _M 20 years , EN ISO 13849-1 Category 4 . EN ISO 13849 Protective field data Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage Ug 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-Interface Safety at Work AS-Interface Safety at Work AS-I profile S-0.B.F	, тррпоацоп		
Type 4 , IEC/EN 61496 SIL 3 , IEC 61508 SILCL 3 , IEC/EN 62061 Performance Level (PL) e. EN ISO 13849-1 PFHD 7.73E-09 per hour Mission time TM 20 years , EN ISO 13849-1 Category 4 , EN ISO 13849 Protective field data Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage Us 26.5 31.6 V Current consumption from AS-I circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-J Function Process AS-J profile S-0.B.F Slave address <	Characteristic parameters		
SILC 3 , IEC 61508		4 IEC/EN 61496	
SILCL 3 ,			
Performance Level (PL) e , EN ISO 13849-1 PFHb 7.73E-09 per hour Mission time T _M 20 years , EN ISO 13849-1 Category 4 , EN ISO 13849 Protective field data Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage UB 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-interface Safety at Work AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
PFHD 7.73E-09 per hour Mission time T _M 20 years , EN ISO 13849-1 Category 4 , EN ISO 13849 Protective field data Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage UB 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-I Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Max. 5 ms			
Mission time T _M 20 years , EN ISO 13849-1 Category 4 , EN ISO 13849 Protective field data Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage Us 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.8 F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Category 4, EN ISO 13849 Protective field data Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage Us 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-I Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Protective field data Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage UB 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage Us 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Category	4 , EN ISO 13849	
Resolution 14 mm Protective field height 1,500 mm Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage Us 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Protective field height 1,500 mm			
Optical data Number of beams 150 Piece(s) Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage UB 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-I Function Process AS-I profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Number of beams Synchronization Optical between transmitter and receiver Detectrical data Protective circuit Performance data Supply voltage UB Current consumption from AS-i circuit Timing Response time Restart delay time Interface Type AS-Interface Safety at Work AS-I Function Process AS-i profile Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Overvoltage between transmitter and receiver Optical between transmitter and receiver As-i profile S-0.B.F Slave address 131 programmable, default=0 Max. 5 ms	Protective field height	1,500 mm	
Number of beams Synchronization Optical between transmitter and receiver Detectrical data Protective circuit Performance data Supply voltage UB Current consumption from AS-i circuit Timing Response time Restart delay time Interface Type AS-Interface Safety at Work AS-I Function Process AS-i profile Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Overvoltage between transmitter and receiver Optical between transmitter and receiver As-i profile S-0.B.F Slave address 131 programmable, default=0 Max. 5 ms			
Synchronization Optical between transmitter and receiver Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage UB Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 1.31 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Optical data		
Electrical data Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage UB 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Number of beams	150 Piece(s)	
Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage UB 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Synchronization	Optical between transmitter and receiver	
Protective circuit Overvoltage protection Short circuit protected Performance data Supply voltage UB 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Short circuit protected Performance data Supply voltage UB 26.5 31.6 V Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Electrical data		
Performance data Supply voltage UB Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Protective circuit	Overvoltage protection	
Supply voltage UB Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Parformance data	Short circuit protected	
Current consumption from AS-i circuit 150 mA Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms		26.5 31.6 V	
Timing Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-I Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Current consumption from A5-1 circuit	150 IIIA	
Response time 33 ms Restart delay time 100 ms Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms		22	
Interface Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Restart delay time	100 ms	
Type AS-Interface Safety at Work AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms	Interface		
AS-i Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms		AS-Interface Safety at Work	
Function Process AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms		The interface energy at Front	
AS-i profile S-0.B.F Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms		Process	
Slave address 131 programmable, default=0 Cycle time acc. to AS-i specifications Max. 5 ms			
Cycle time acc. to AS-i specifications Max. 5 ms			
Connection	o job and doo. to no representations	max. o mo	
Connection	Connection		
Number of connections 2 Piece(s)		2 Piace(s)	
2 FIGUE(5)	TAUTHOUT OF COTHIECTIONS	211000(3)	



Connection 1			
Type of connection	Connector	Connector	
Function	Machine interface		
Thread size	M12		
Material	Metal		
No. of pins	5 -pin		
Connection 2			
Type of connection	Cable with connector		
Function	Cascade, Guest Out Cascade, Middle Guest Out		
Cable length	330 mm	330 mm	
Sheathing material	PUR	PUR	
Thread size	M12	M12	
Material	Plastic	Plastic	
No. of pins	8 -pin	8 -pin	
Cable properties			
Permissible conductor cross section, typ.	0.25 mm²	0.25 mm ²	
Length of connection cable, max.	100 m	100 m	
Permissible cable resistance to load, max.	200 Ω	200 Ω	

Mechanical data	
Dimension (W x H x L)	29 mm x 1,566 mm x 35.4 mm
Housing material	Metal , Aluminum
Lens cover material	Plastic / PMMA
Material of end caps	Diecast zinc
Net weight	1,725 g
Housing color	Yellow, RAL 1021
Type of fastening	Groove mounting Mounting bracket Swivel mount

Operation and display		
Type of display	LED	
Number of LEDs	2 Piece(s)	

Environmental data		
Ambient temperature, operation	0 55 °C	
Ambient temperature, storage	-30 70 °C	
Relative humidity (non-condensing)	0 95 %	

Certifications		
Degree of protection	IP 65	
Protection class	III	
Certifications	c CSA US c TÜV NRTL US TÜV Süd	
Vibration resistance	50 m/s ²	
Shock resistance	100 m/s²	
US patents	US 6,418,546 B	

Classification




Customs tariff number	85365019	
eCl@ss 8.0	27272704	
eCl@ss 9.0	27272704	
ETIM 5.0	EC002549	
ETIM 6.0	EC002549	

Dimensioned drawings

All dimensions in millimeters

Calculation of the effective protective field height Hpfe = Hpfn + B + C

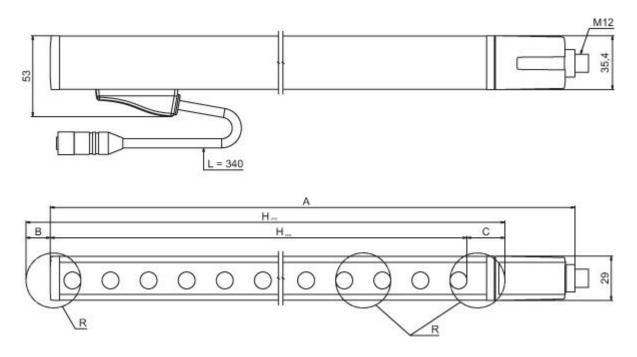

HPFE Effective protective field height = 1512 mm

HPFN Nominal protective field height = 1500 mm


- A Total height = 1566 mm
- B 6 mm
- C 6 mm
- R Effective protective field height HPFE goes beyond the dimensions of the optics area to the outer borders of the circles labeled with R.

Electrical connection

Connection 1	
Type of connection	Connector
Function	Machine interface
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded



Pin	Pin assignment
1	AS-i+
2	n.c.
3	AS-i-
4	n.c.
5	n.c.



Connection 2	
Type of connection	Cable with connector
Function	Cascade, Guest Out Cascade, Middle Guest Out
Cable length	330 mm
Sheathing material	PUR
Cable color	Black
Wire cross section	0.14 mm²
Type of stranding	Pair stranding (twisted pair)
Thread size	M12
Туре	Female
Material	Plastic
No. of pins	8 -pin
Encoding	A-coded

Operation and display

LEDs

LED	Display	Meaning	
1	Off	Device switched off	
	Red, continuous light	Protective field interrupted	
	Red, flashing, 1 Hz	External error	
	Red, flashing, 10 Hz	Internal error	
	Green, flashing, 1 Hz	Protective field free, weak signal	
	Green, continuous light	Protective field free	
2	Off	No voltage	
	On	OSSD off, transmission channel C2	
	Green, continuous light	AS-i slave communicating with AS-i master	
	Red, continuous light	AS-i slave not communicating with AS-i master	
	Yellow, flashing	AS-i slave has invalid address 0	
	Red, flashing	AS-i slave device error or AS-i connection defective	
	Red/green, flashing alternately	Periphery error	



Suitable transmitters

Part no.	Designation	Article	Description
68016115	MLC500T14-1500H/ A		Resolution: 14 mm Protective field height: 1,500 mm Operating range: 0 6 m Interface: AS-Interface Safety at Work Connection: Connector, M12, Metal, 5 -pin

Part number code

Part designation: MLCxyy-za-hhhhei-ooo

MLC	Safety light curtain
х	Series: 3: MLC 300 5: MLC 500
уу	Function classes: 00: Transmitter 01: transmitter (AIDA) 02: Transmitter with test input 10: Basic receiver - automatic restart 11: basic receiver - automatic restart (AIDA) 20: Standard receiver - EDM/RES selectable 30: Extended receiver - blanking/muting
z	Device type: T: transmitter R: receiver
а	Resolution: 14: 14 mm 20: 20 mm 30: 30 mm 40: 40 mm 90: 90 mm
hhhh	Protective field height: 150 3000: from 150 mm to 3000 mm
е	Host/Guest (optional): H: Host MG: Middle Guest G: Guest
i	Interface (optional): /A: AS-i
000	Option: /V: high Vibration-proof EX2: explosion protection (zones 2 + 22) SPG: Smart Process Gating

Note

A list with all available device types can be found on the Leuze electronic website at www.leuze.com.

Notes

Observe intended use!

- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.



Accessories

Connection technology - Interconnection cables

Part no.	Designation	Article	Description
429278	CB- M12-2000E-8TP	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 8 -pin Shielded: Yes Cable length: 2,000 mm Sheathing material: PUR

Mounting technology - Swivel mounts

Part no.	Designation	Article	Description
429393	BT-2HF	Mounting bracket set	Contains: 2x BT-HF swivel mount, 1 cylinder for mounting on the light curtain Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

Services

	Part no.	Designation	Article	Description
	S981050	CS40-I-140	Safety inspection "Safety light barriers"	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
[@	S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.